

Flexible. Specific. Innovative.

XFlame®

... hold firm - even
when the sparks
fly!



Advantages:

- Inflammable according to UL94 V0/V2
- Welding spray resistant
- Halogen-free according to EN 50267-2-1 (corresponds with IEC 60754-1)
- Self-extinguishing in case of fire
- LABS-free (free of substances that prevent paint adhesion)
- For use with drag chains
- Plasticizer-free
- Very good wear resistance
- Bend-resistant
- Elastic
- For temperature ranges from -40 °C to +90 °C
- Minimum burst pressure at 23°C: 60 bar (Values under Novoplast test conditions determined for tube size 6x2x10 mm)

Applications:

- Welding systems
- Welding robots
- Welding machines
- Spot welding tongs
- Associated welding areas
- Cooling- and hot water applications
- Pneumatic

Standard color:

■ Black

- Dimensions and special colors on request

The robust XFlame® is your partner for demanding applications.

Novoplast Schlauchtechnik GmbH
In den Langen Stücken 6
38820 Halberstadt · Germany
Phone +49 3941 68 69-0
Fax +49 3941 68 69-189
www.schlauchtechnik.de
Industry.Novoplast@Masterflex-Group.com

A MASTERFLEX GROUP COMPANY

stand: 05/2017
photos: file Novoplast Schlauchtechnik GmbH · © www.fotolia.de

 **NOVOPLAST**
SCHLAUCHTECHNIK


Connecting Values

Flexible. Specific. Innovative.

XFlame®

Tube dimension ID*	Tube dimension WT*	Tube dimension OD*	Tolerance OD mm	Tolerance WT mm	Weight g/m	Max. working pressure resistance (at 23°C)	Min. bending radius
2	1	4	±0,10	-0,15	12	24	7
4	1	6	±0,10	-0,15	19,9	16	8
4	2	8	±0,15	+0,05/-0,10	47,9	24	9
6	2	10	±0,15	±0,10	63,8	20	15
8	2	12	±0,15	+0,15 /-0,05	79,8	14	26
10	2	14	±0,15	+0,15 /-0,05	95,8	13	38
11	2,5	16	±0,15	+0,15 /-0,05	134,7	14	48

*ID = inside diameter, WT = wall thickness, OD = outside diameter

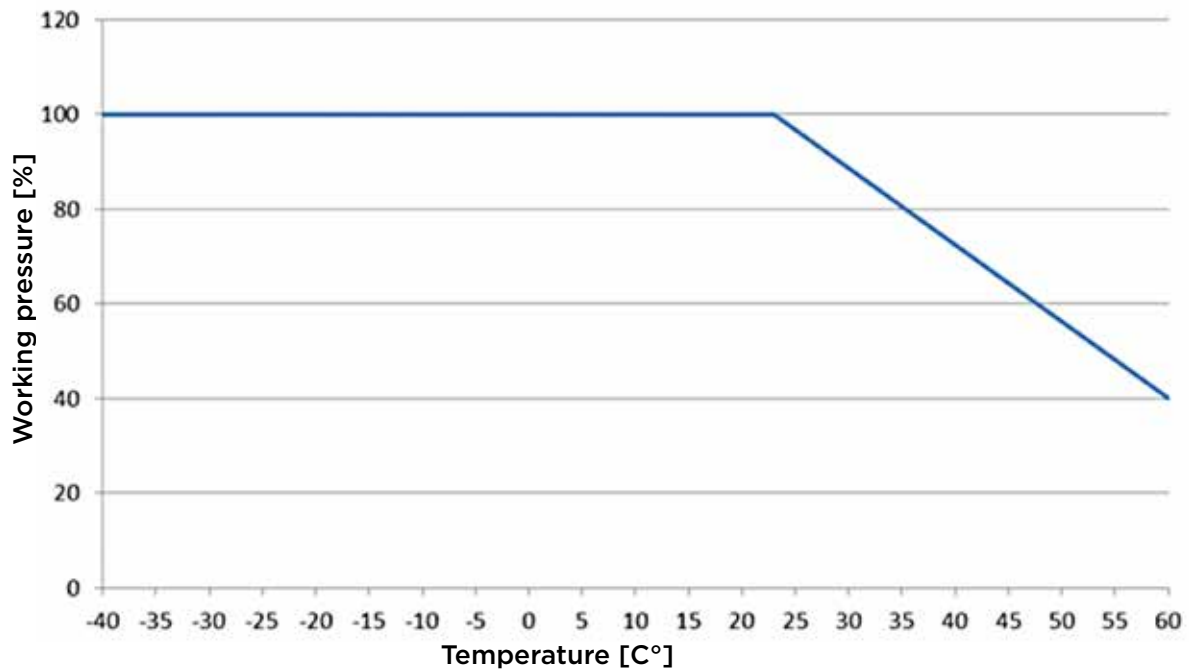

Novoplast Schlauchtechnik GmbH
 In den Langen Stücken 6
 38820 Halberstadt · Germany
 Phone +49 3941 68 69-0
 Fax +49 3941 68 69-189
 www.schlauchtechnik.de
 Industry.Novoplast@MasterflexGroup.com

A MASTERFLEX GROUP COMPANY

stand: 05/2017
 photos: file Novoplast Schlauchtechnik GmbH



Connecting Values